





Rail systems
Glass roof awning



Capri

Just
enjoy life!

Lewens
MARKISEN

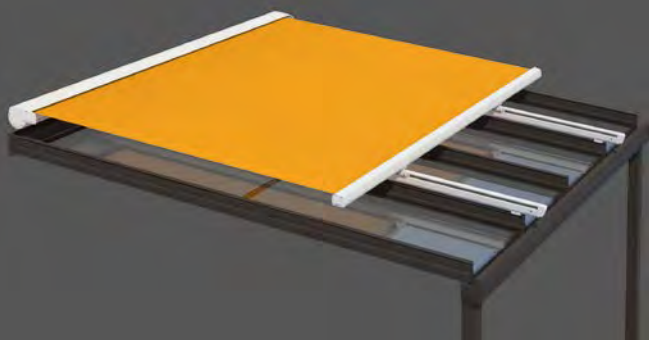




Equipment and extras

- Width, 1 unit max. 700 cm (Pergola type max. 600 cm), joined system max. 1200 cm, drop max. 600 cm
- Electric motor
- Options:
 - Radio motor/ radio remote control,
 - automatic weather sensor,
 - radiant heater,
 - extra fabric supports

Capri – all aspects well covered

Roof-mounted awning for glass roofs and conservatories

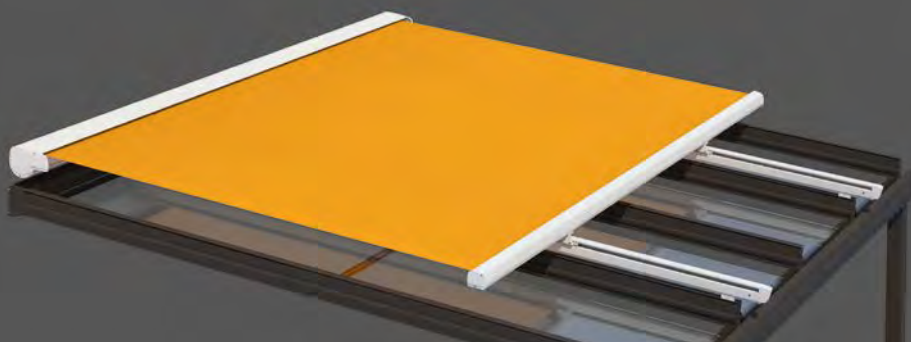

Flexible positioning


Since the guide rails lie underneath the fabric, they can be positioned flexibly and moved inwards symmetrically on installation up to 80 cm from the outside edge.



Capri roof-mounted type: sturdy, decorative and heat-repellent shade provider on the conservatory.

The Capri awning is fitted to conservatories and glass roofs as an external sunshade, preventing excessive sunlight from getting in. When used on conservatories in particular, it protects the room from heating up. Available as a single awning or a joined system, this awning is suitable also for large areas and conservatories.

Featuring guide rails that can be positioned recessed inwards, it is the perfect solution for a hipped conservatory or inclined glass surfaces.

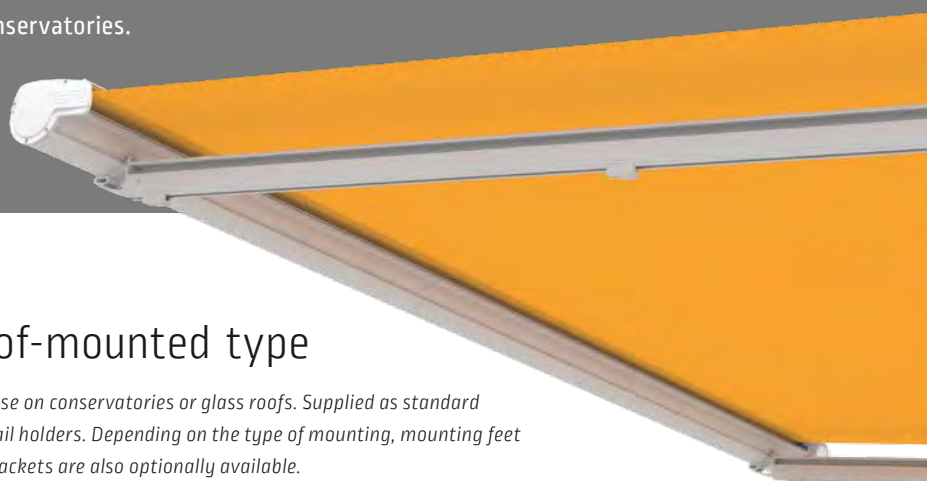


Roof-mounted type

– for use on conservatories or glass roofs. Supplied as standard with rail holders. Depending on the type of mounting, mounting feet and brackets are also optionally available.



Capri

Equipment and technical features



Manufactured and assembled in Germany
Quality and technology CE-compliant

| Type | Roof-mounted |
|---|-------------------------------------|
| System height <i>(incl. standard attachment)</i> | 241 mm |
| Unit widths <i>(max.)</i> | |
| 1 unit <i>(single field)</i> | 700 cm |
| 2 units <i>(joined system without slit cover, fabric gap 4 cm)</i> | 1.200 cm |
| Drop <i>(max.)</i> | |
| Depth <i>(incl. cassette, plus 11 cm pulley)</i> | 600 cm |
| Drive | |
| Electric motor <i>(for wall switch)</i> | <input checked="" type="checkbox"/> |
| Radio motor <i>(io)</i> | <input type="checkbox"/> |
| Frame colours | |
| 17 RAL colours + 6 textured finishes <i>(Lewens standard colours)</i> | <input checked="" type="checkbox"/> |
| Additional RAL, special colours and effect finishes | <input type="checkbox"/> |
| Awning fabrics <i>from the LEWENS collection</i> | |
| Branded acrylic <i>(spun-dyed, ultra fade resistant)</i> | <input checked="" type="checkbox"/> |
| Branded polyester <i>(spun-dyed, ultra fade resistant)</i> | <input type="checkbox"/> |
| Tenara quality sewing yarn <i>(With corner reinforcement and side hem, 10 cm)</i> | <input checked="" type="checkbox"/> |
| Options | |
| 1 Radio motor + radio remote control <i>(io)</i> | <input type="checkbox"/> |
| 2 Automatic weather sensor <i>(sund,wind, rain)</i> | <input type="checkbox"/> |
| 3 Radiant heater <i>(only wall attachment)</i> | <input type="checkbox"/> |
| 4 Extra fabric support | <input type="checkbox"/> |
| Attachment | |
| Roof mounting | <input checked="" type="checkbox"/> |
| Inward positioning of guide rails and posts | |
| Inward positioning | max. 80 cm |
| <i>(other) inward positioning on request <i>(indicate when ordering)</i></i> | <input type="checkbox"/> |
| Attachment materials | |
| Rail holders <i>(without assembly screws/plugs)</i> | <input checked="" type="checkbox"/> |
| additional/further attachment materials | <input type="checkbox"/> |
| Note | |
| <i>Due to the design and the weight of the awning fabric, the fabric may sag in the middle on large awning sizes. However, this has no effect on the operation and / or service life of the awning.</i> | |

Possible dimensions and restrictions along with the complete range of electronic accessories can be found in the technical data in the current Lewens price list.

■ Standard □ Option



Your stockist will be happy to advise you:



www.lewens-markisen.de

Subject to technical alterations. Date: 06/2021